

Operating Instruction


MIXER



Henan Hongxing Heavy Machinery Co., Ltd.

The Application and Function of Mixer:

Mixer is the indispensable equipment to fully mix the reagent and the ore pulp, increase the reaction time of the reagent and strengthen the quality of the reagent reaction. This machine is suitable to be used in ore beneficiation industry and also for stirring the ingredients in all various industries.

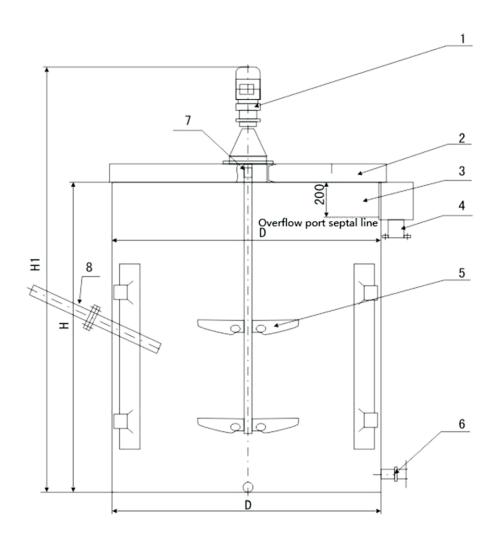

- 1.Speed reducer
- 2.Gear trestle

3. Trough body(FRP)

- 4.Overflow port(FRP)d1
- 5.Stirring shaft leaf(FRP)
- 6.Lower discharging port (FRP)d1

7.Coupling

8. Feeding pipe d3 (FRP)

The Working Process of Mixer:

When the machine works, under the rotation of the impeller, the ore pulp and the reagents will have big and small circulation, and they will be evenly mixed, and the mixed suspension liquid will be discharged from the overflow port.

Characteristics:

Supply Ability: 20 Set/Sets per Month

Certificate: ISO9001:2008
Type: Ore dressing machine

Feature: Stir, Good sealing, Rapid discharge



Working principle

When the machine works, under the rotation of the impeller, the ore pulp and the reagents will have big and small circulation, and they will be evenly mixed, and the mixed suspension liquid will be discharged from the overflow port.



Features

This machine is set before the flotation machine to make the reagent and the ore pulp be fully mixed. This machine is suitable for mixing the ore pulp whose density is lower than 3.5 and the flotation reagents whose density is lower than 30%.

Technical data:

| Specification | Chute inner dimension | | Effective cubage | Mixer | | Motor | | Total weight |
|---------------|--------------------------|---------------|------------------|------------------|----------------------------|----------|---------------|--------------|
| | Diameter (mm) | Depth (mm) | (m³) | Diameter (mm) | Rotate speed (r/min) | Model | Power (kw) | (kg) |
| XB-750 | 750 | 750 | 0.26 | 240 | 530 | Y90S-4 | 1.1 | 550 |
| XB-1000 | 1000 | 1000 | 0.58 | 240 | 530 | Y90L-4 | 1.5 | 700 |
| XB-1200 | 1200 | 1200 | 1.14 | 400 | 320 | Y100L2-4 | 3 | 980 |
| XB-1500 | 1500 | 1500 | 2.2 | 400 | 320 | Y100L2-4 | 3 | 1330 |
| XB-2000 | 2000 | 2000 | 5.46 | 550 | 230 | Y132M2-6 | 5.5 | 2100 |
| XB-2500 | 2500 | 2500 | 11.2 | 650 | 200 | Y160L-6 | 11 | 3438 |
| XB-3000 | 3000 | 3000 | 19.1 | 700 | 210 | Y225S-8 | 18.5 | 5100 |
| XB-3500 | 3500 | 3500 | 30 | 850 | 230 | Y225M-8 | 22 | 7900 |





Pre-sale services: enthusiasm

We provide you with the prophase plan, process flow design and manufacturer equipment according to your special demand.

Salo corvicos: corvant

Send technicians to the jobsite for guiding the installation and adjustment, training operators and finishing the check and accept together with you.

After-sale services: faithfulness

To establish long term friendship, we will regularly pay return visit to customers. Supplying technique, building design, instruction, installation